RECOLUX

ClickFast

Universal Trunking Retroft System

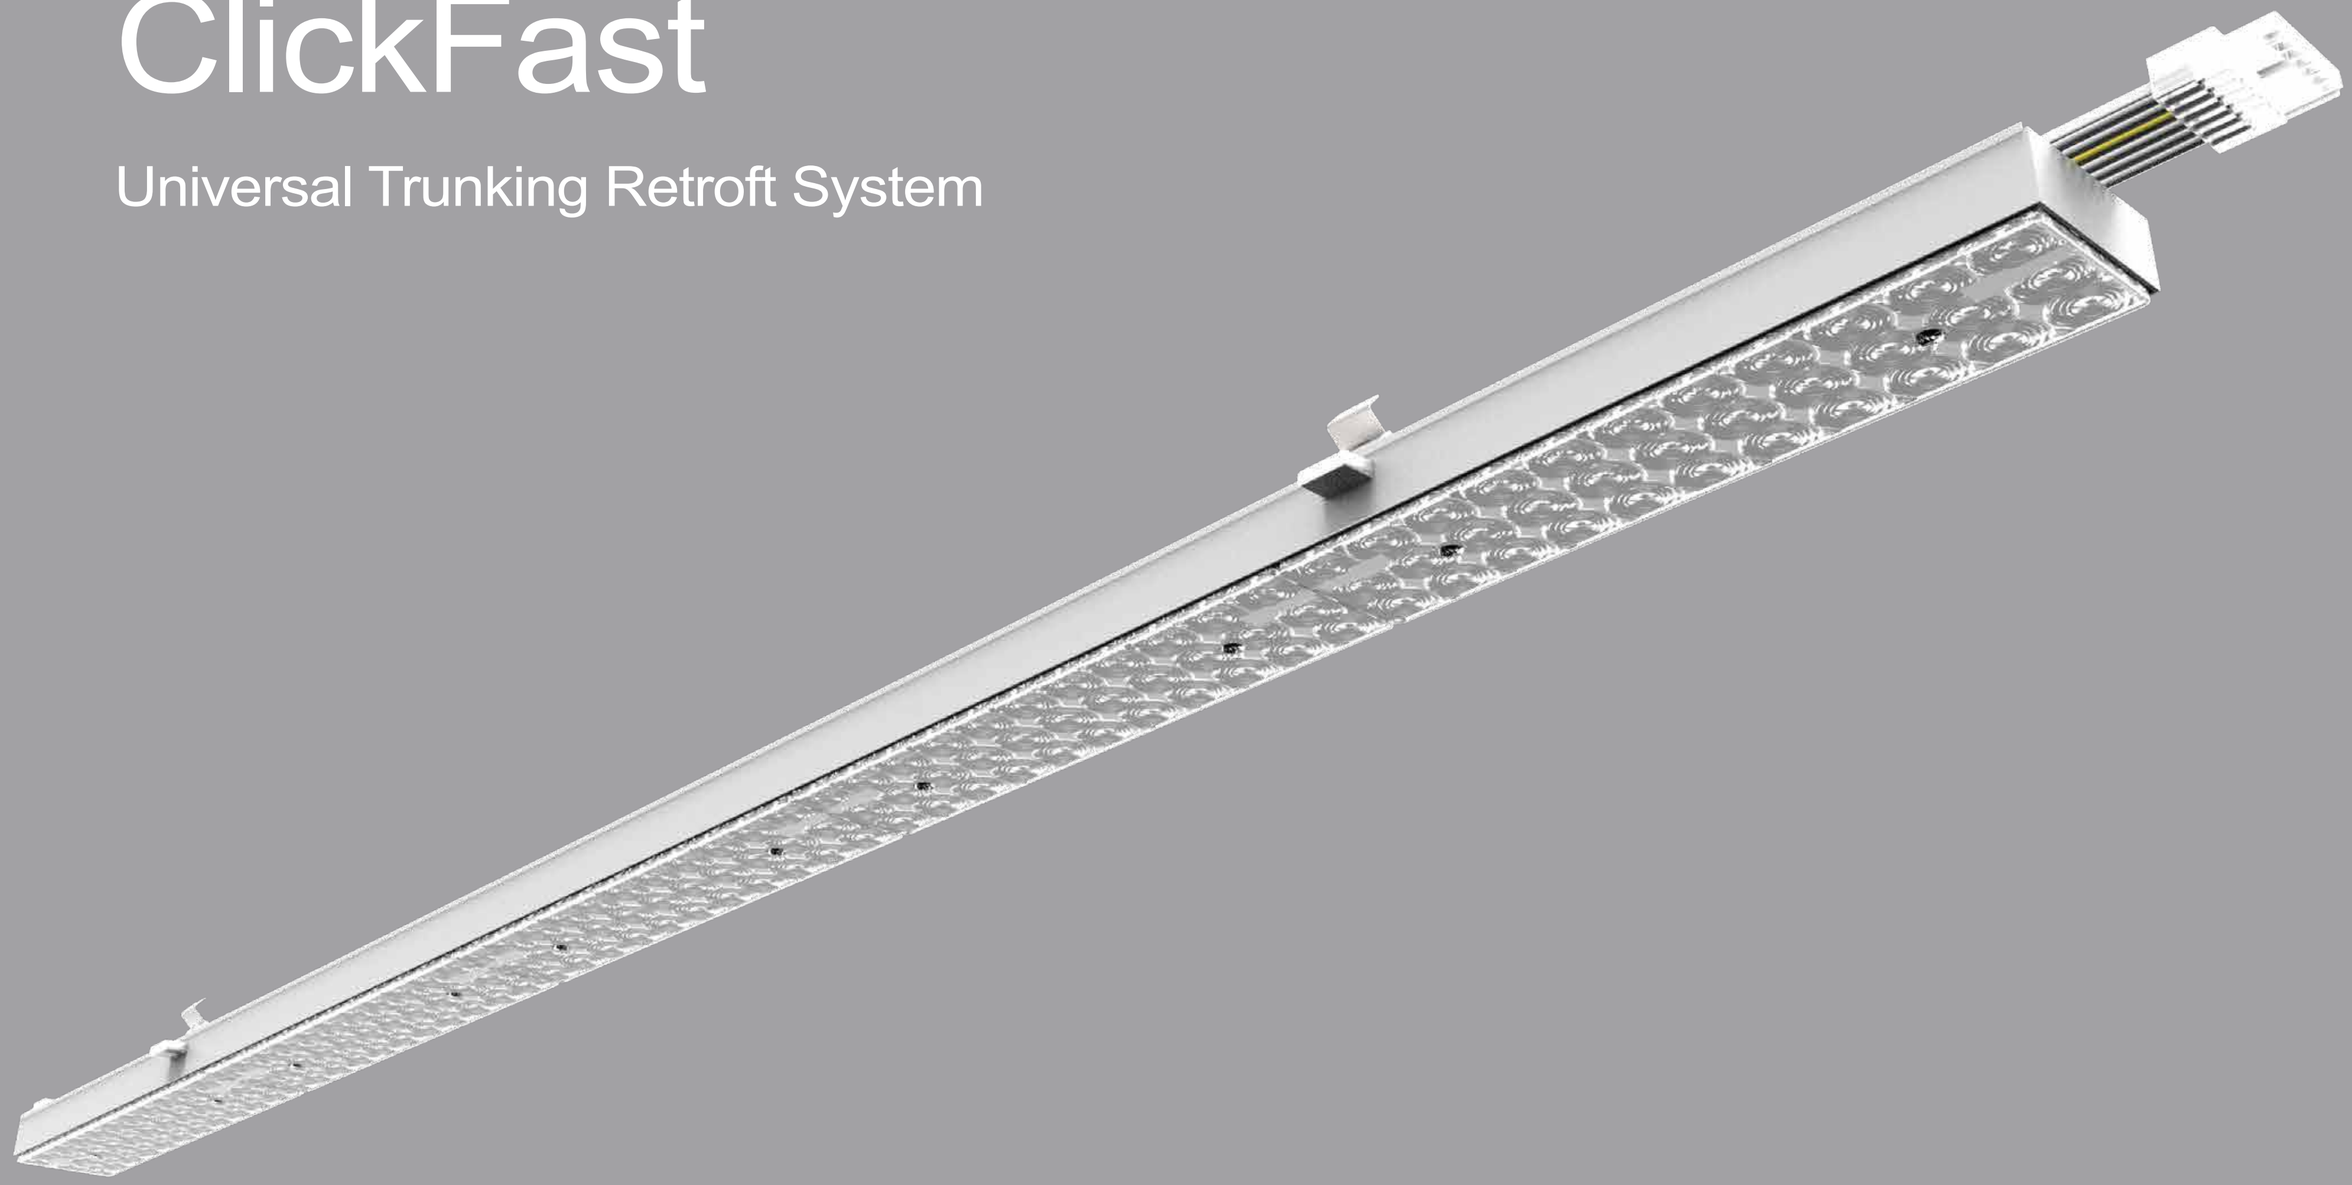

+86-159 8664 8286

www.recolux-lighting.com

No. 7 Xinfa Road, Xinqiaowei Industrial Zone, KengZi, Pingshan , Shenzhen, 518118, PRC

gordon@recolux.com

Best choice for updating and compatible with the existing T8 & T5 trunking system from Trilux, Siteco, Ridi, Regiolux,Philips, Ludwig, Zumtobel etc

Clever Click Design

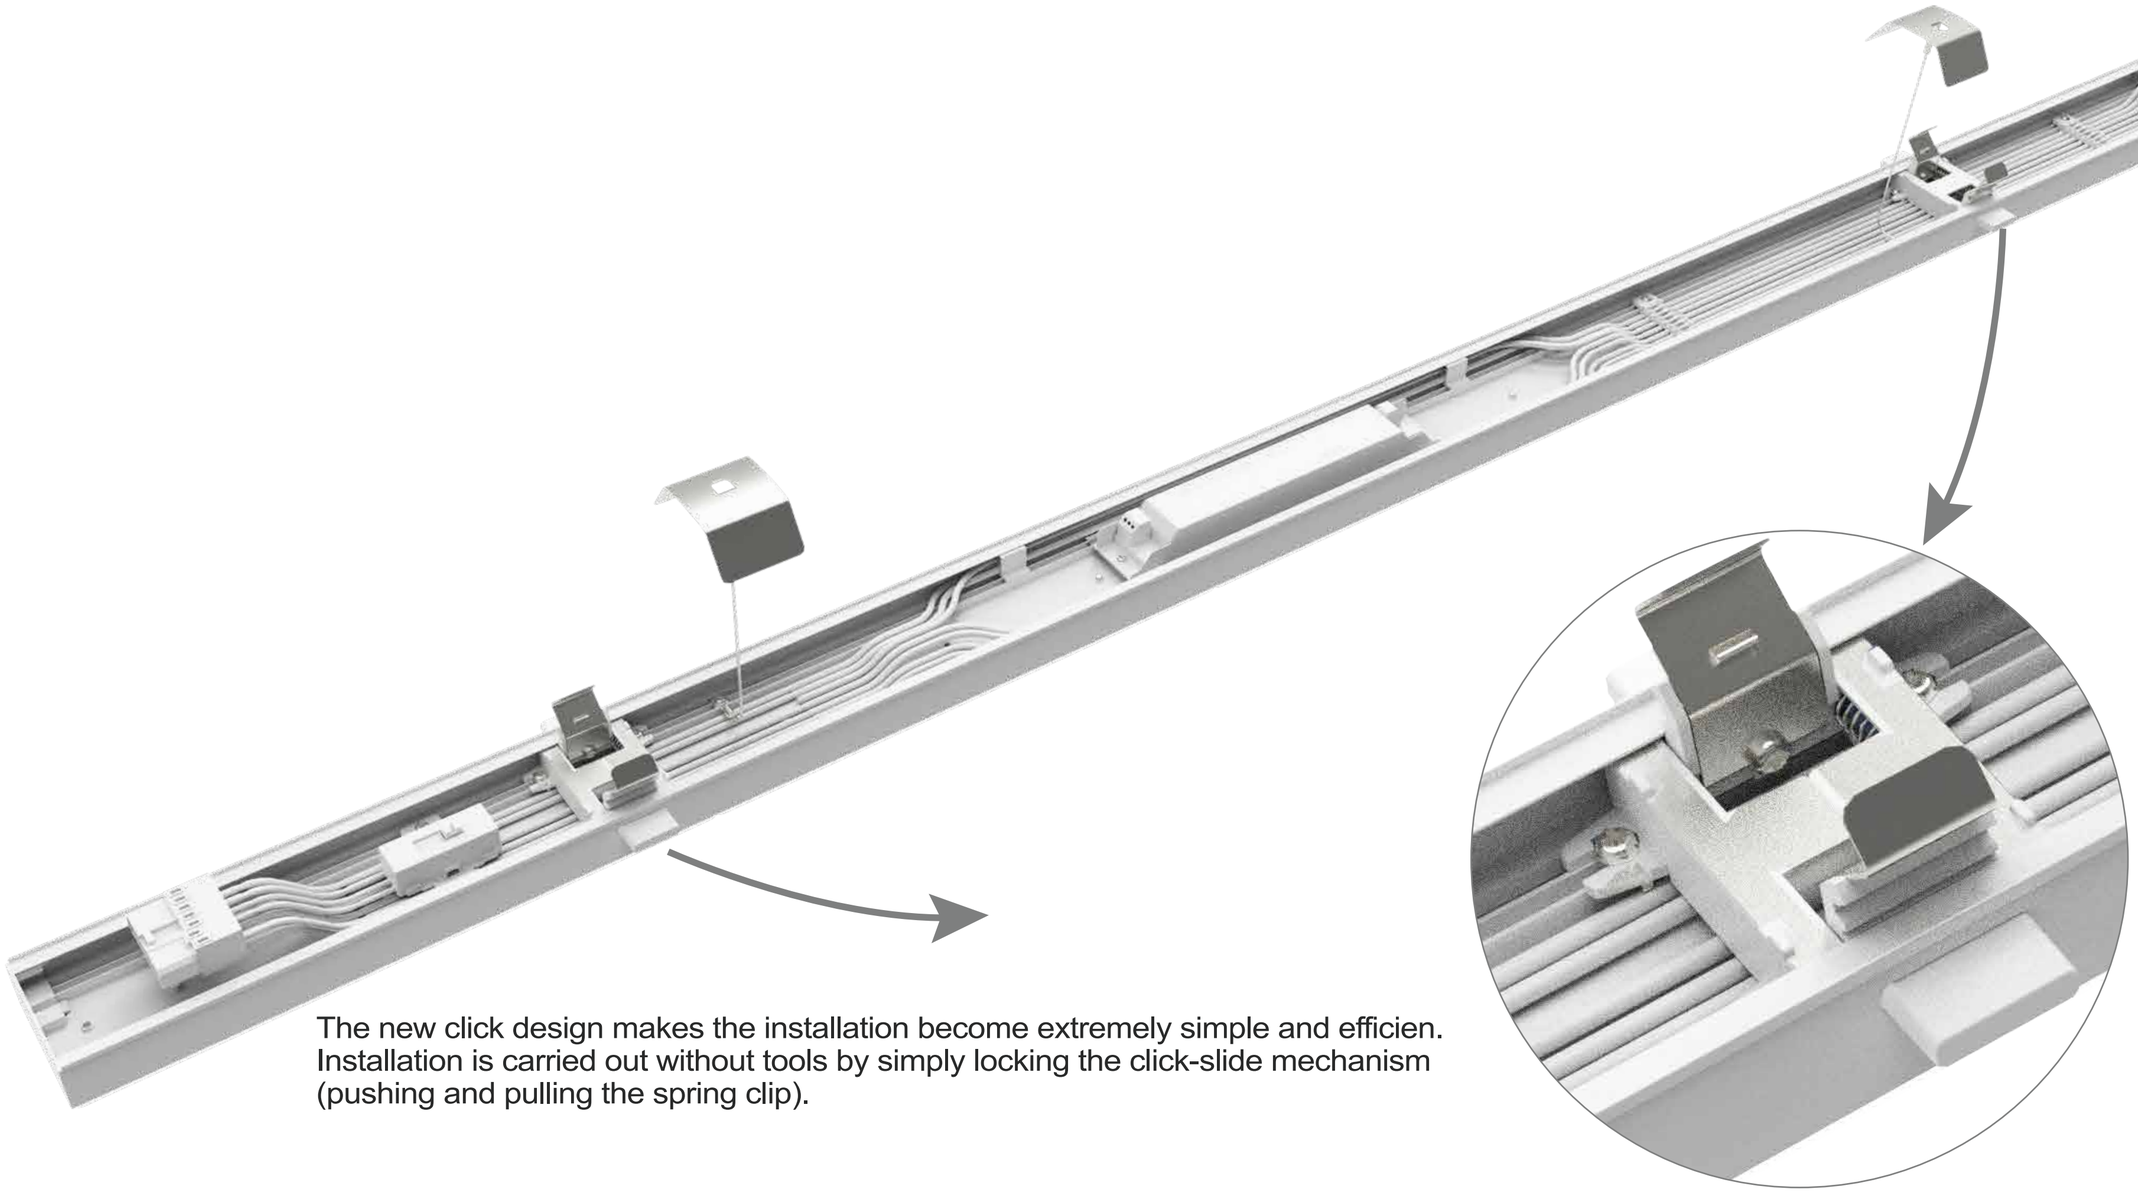

The new click design makes the installation become extremely simple and efficien. Installation is carried out without tools by simply locking the click-slide mechanism (pushing and pulling the spring clip).

Simple phase change

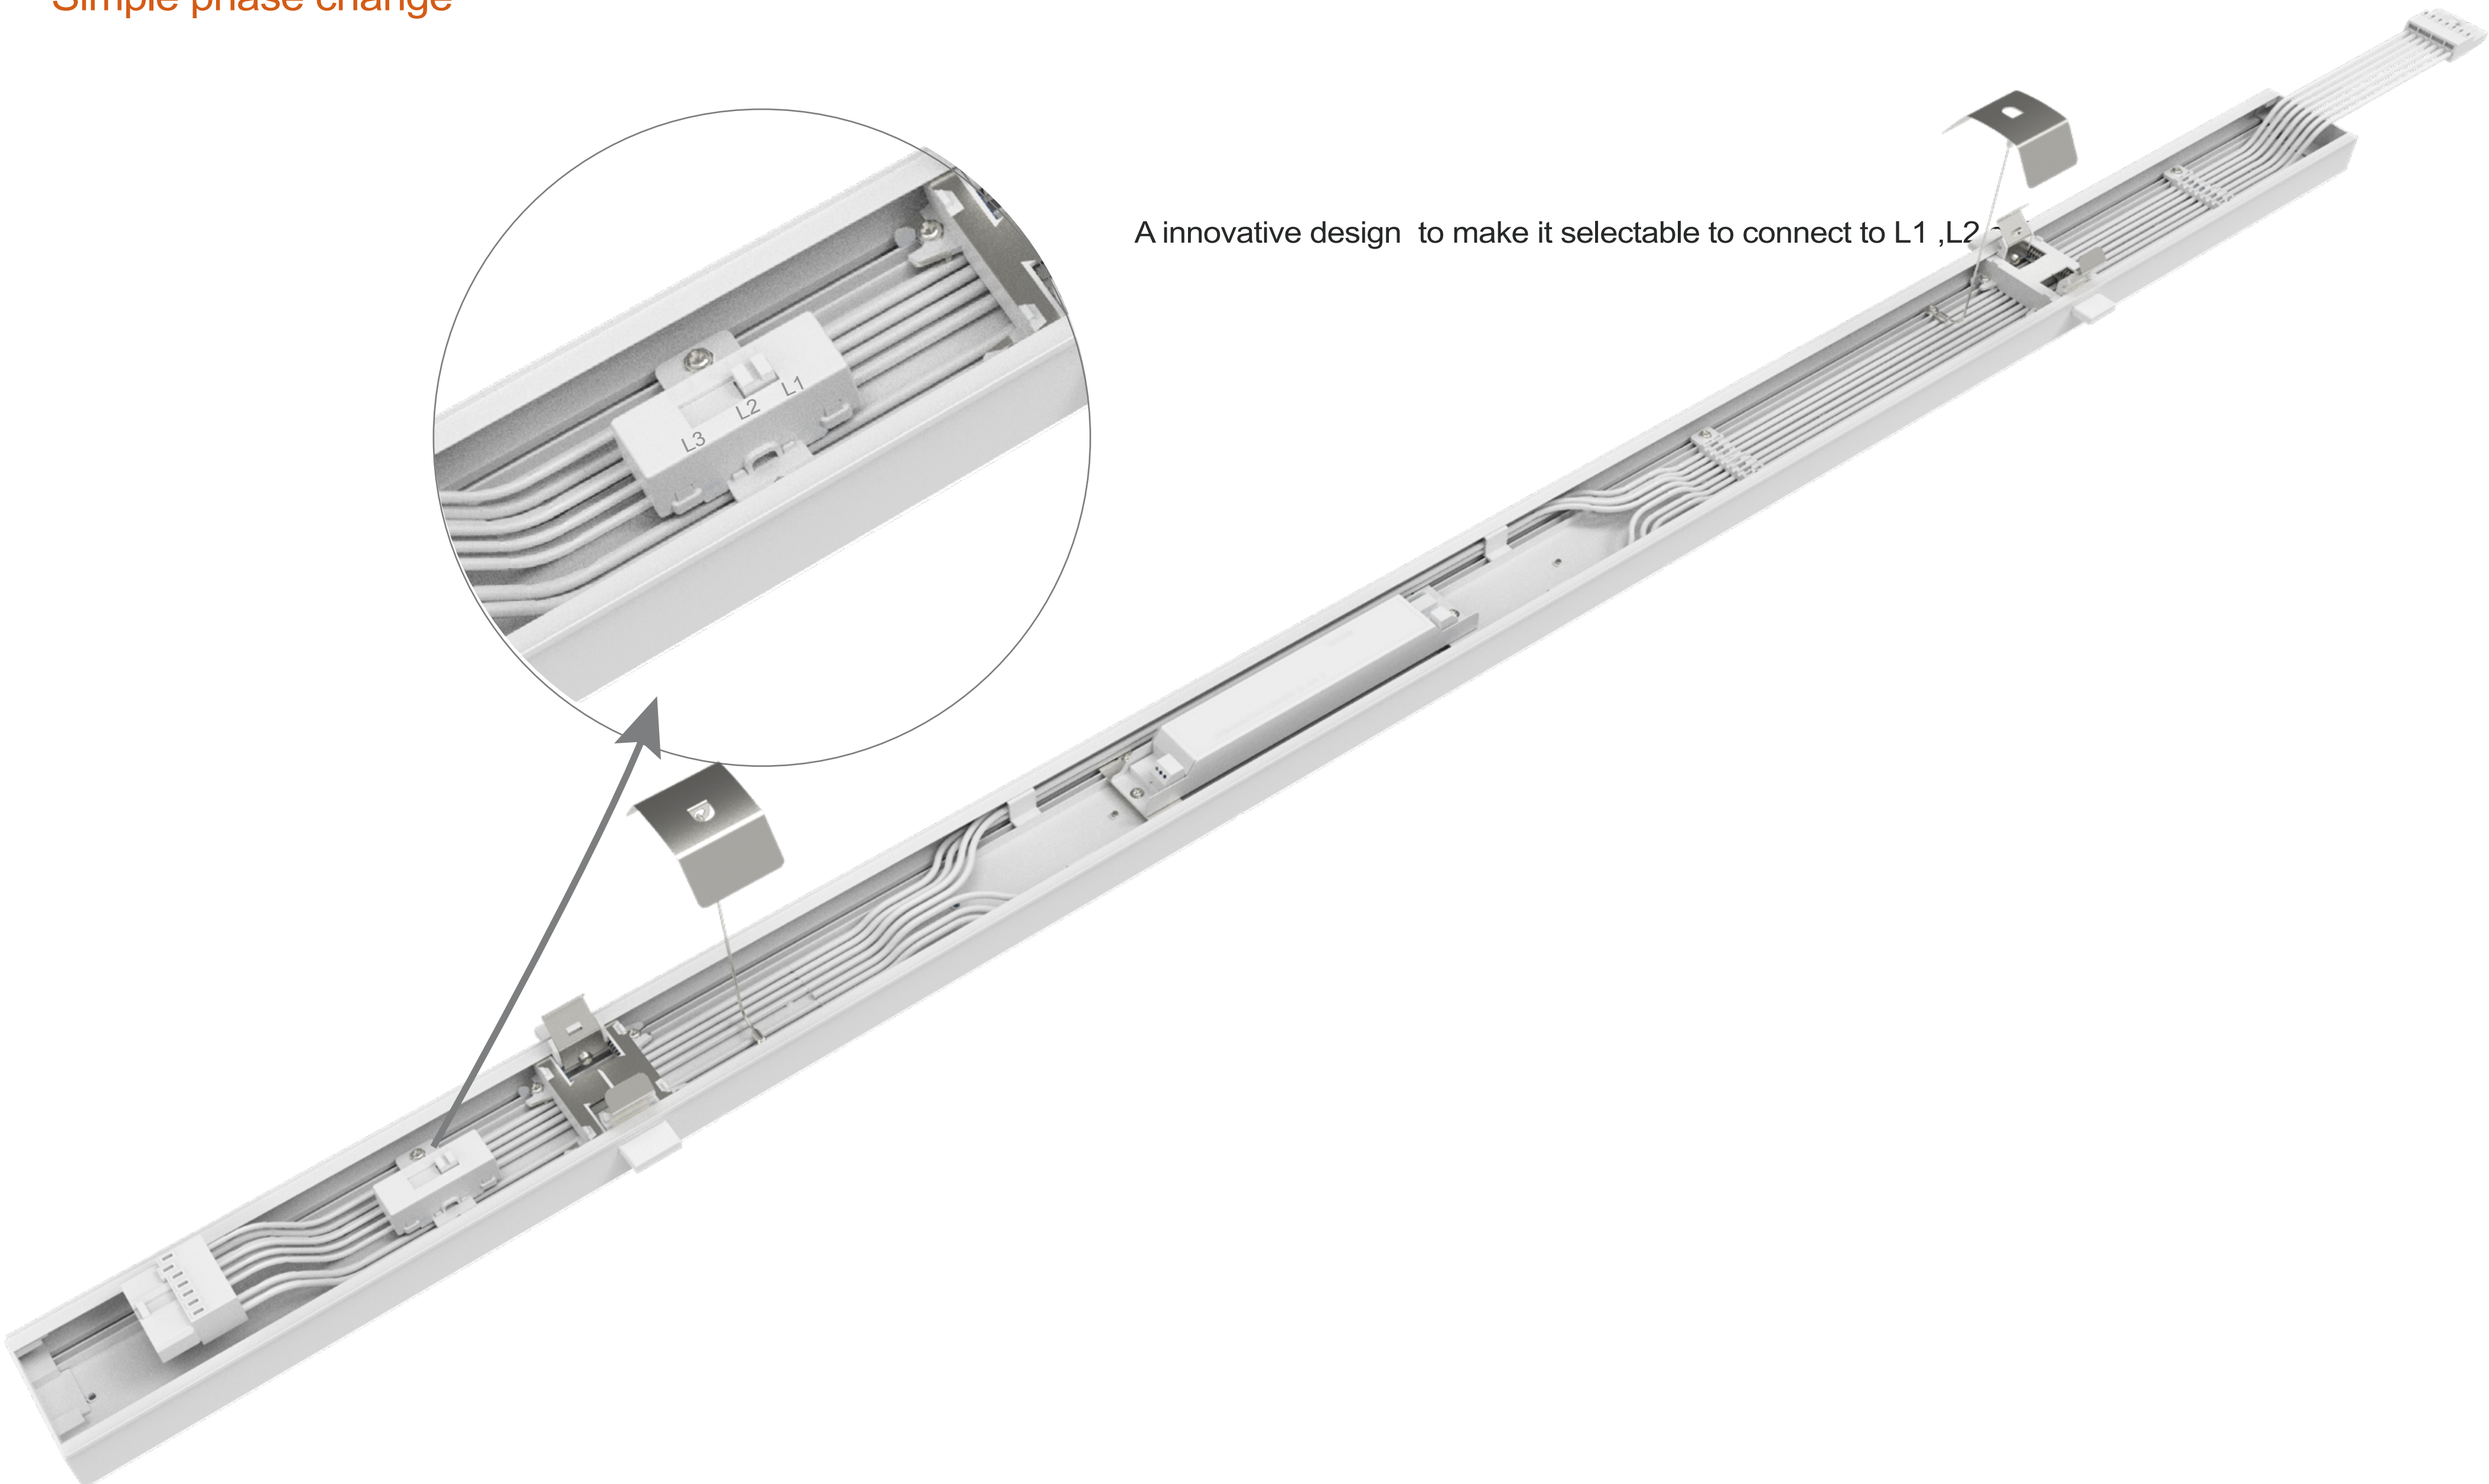

A innovative design to make it selectable to connect to L1 ,L2 o

Wago Pluggable Connectors

Persistent in product quality, we choose the highest standard WAGO connectors.

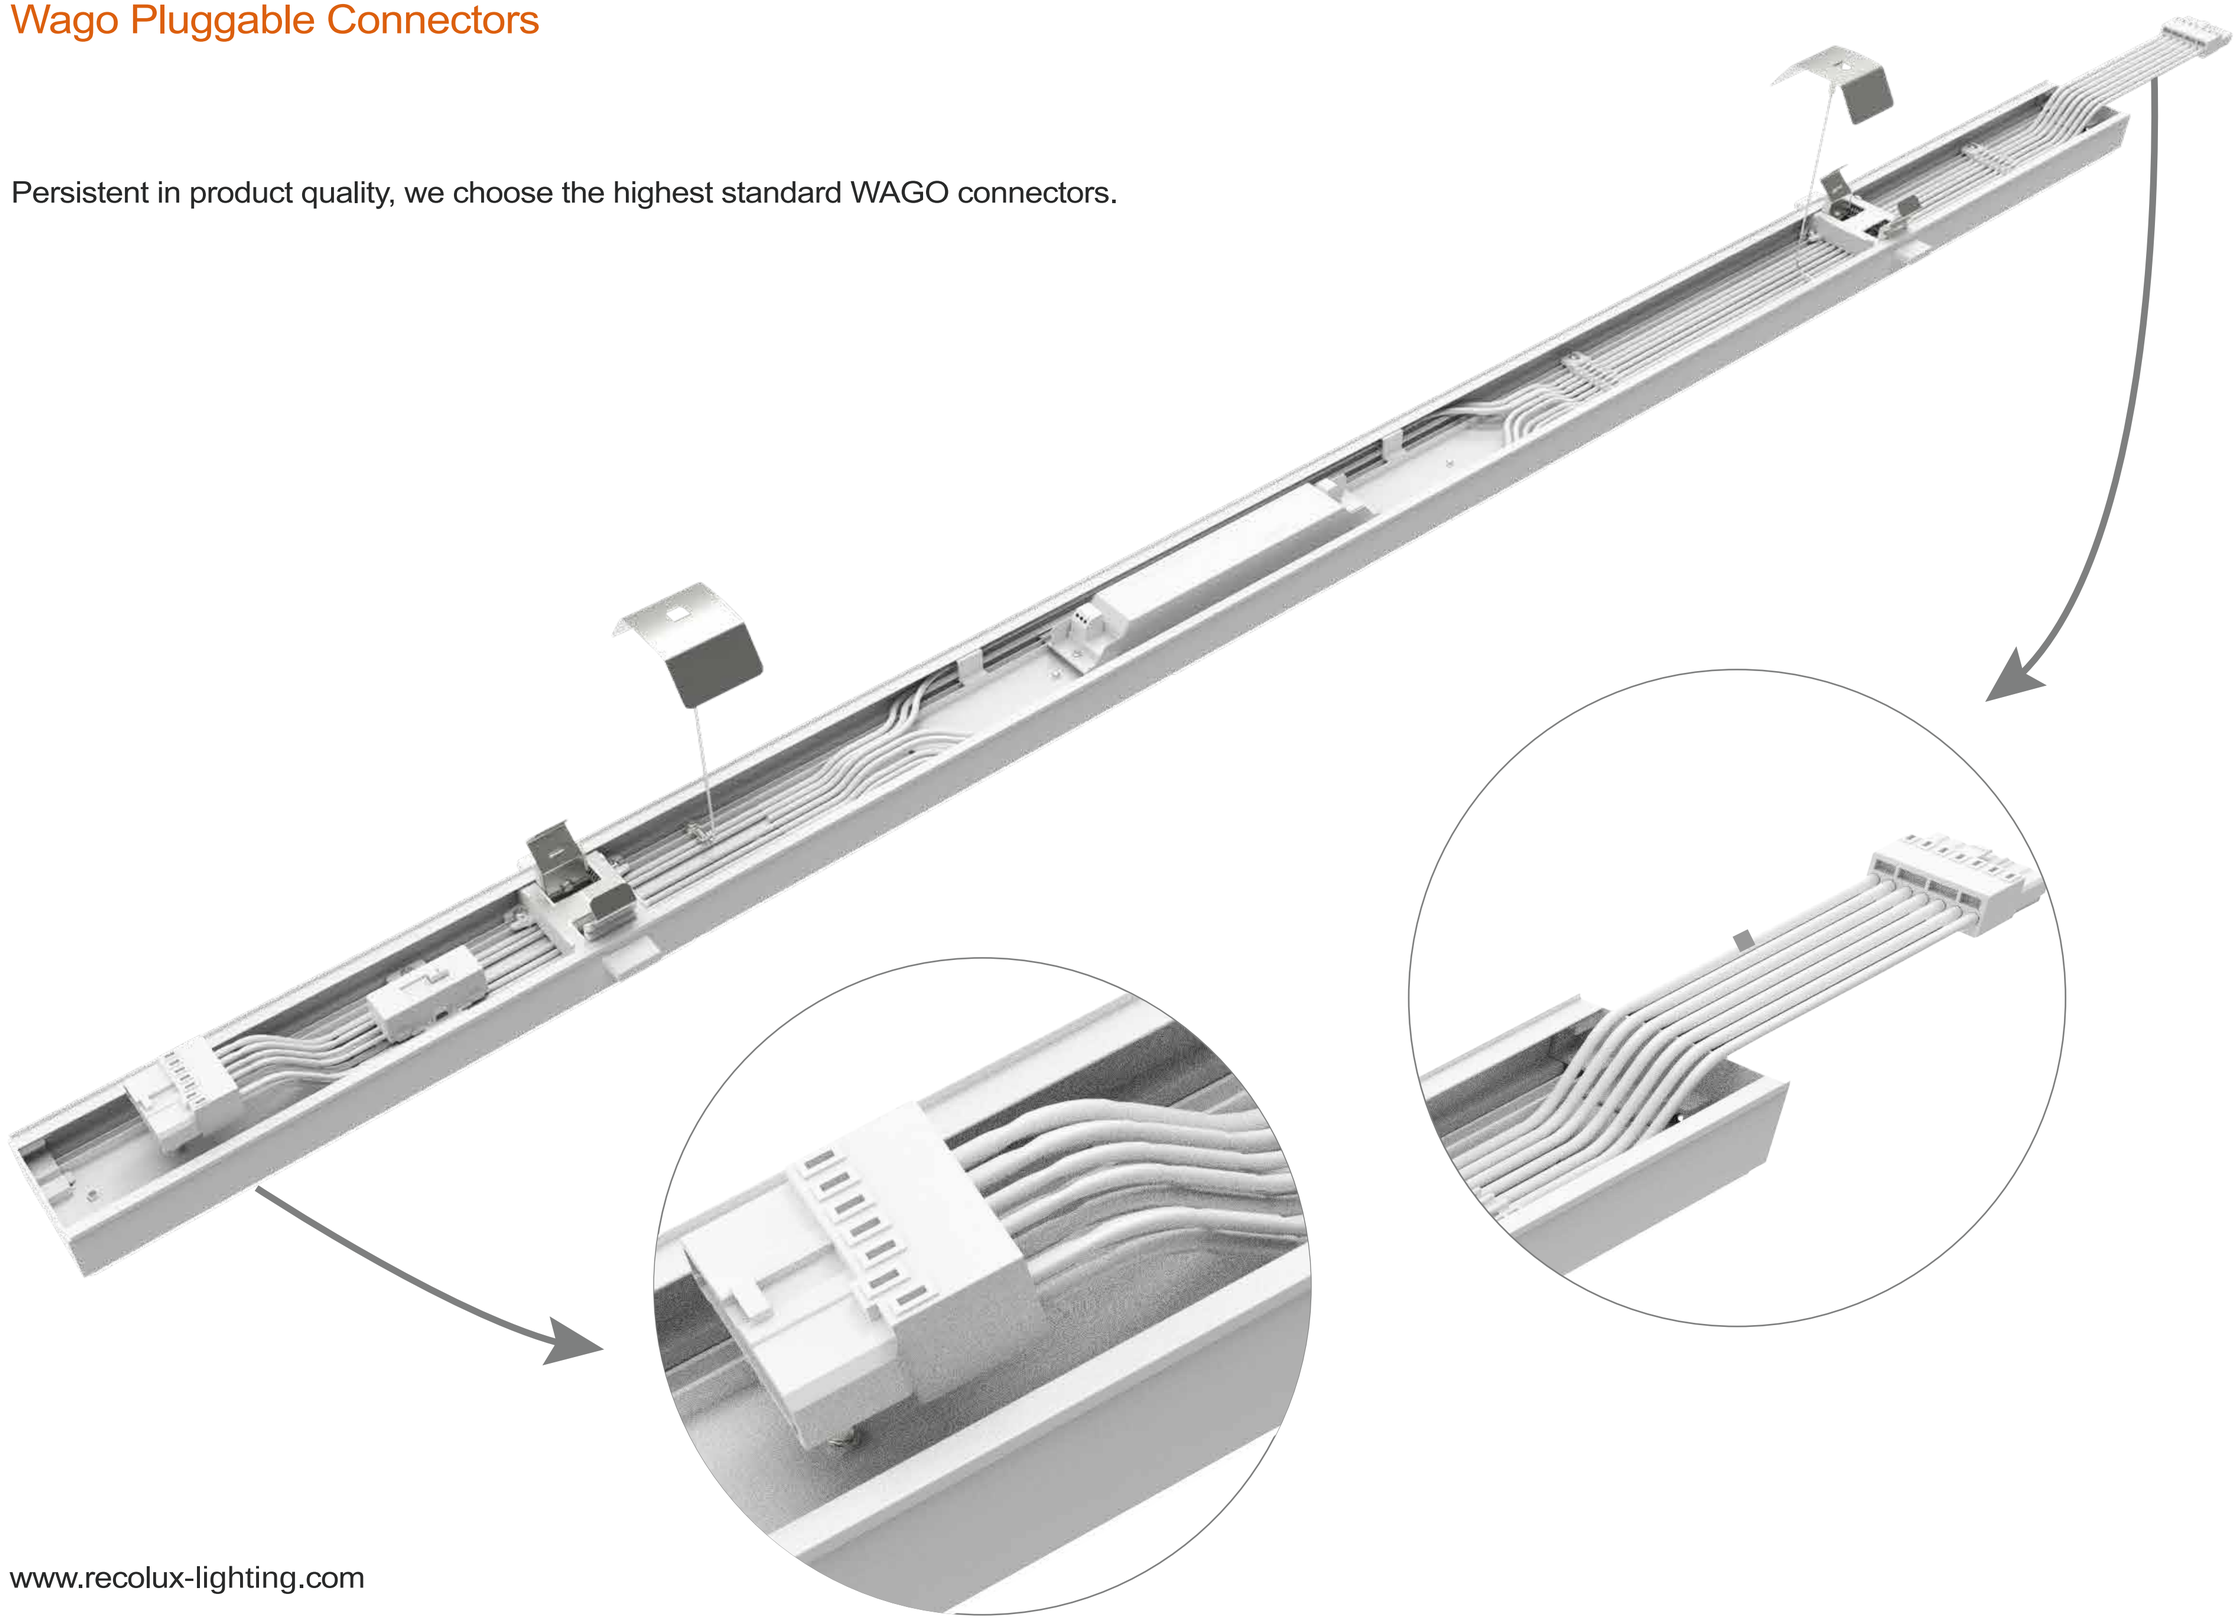

Tridonic / Osram Driver

With our warranty promise up to 5 or 7 years,
We only use the highest quality components , such as Tridonic, Osram, etc.
It's extremly easy to select the power range by setting the dip switch

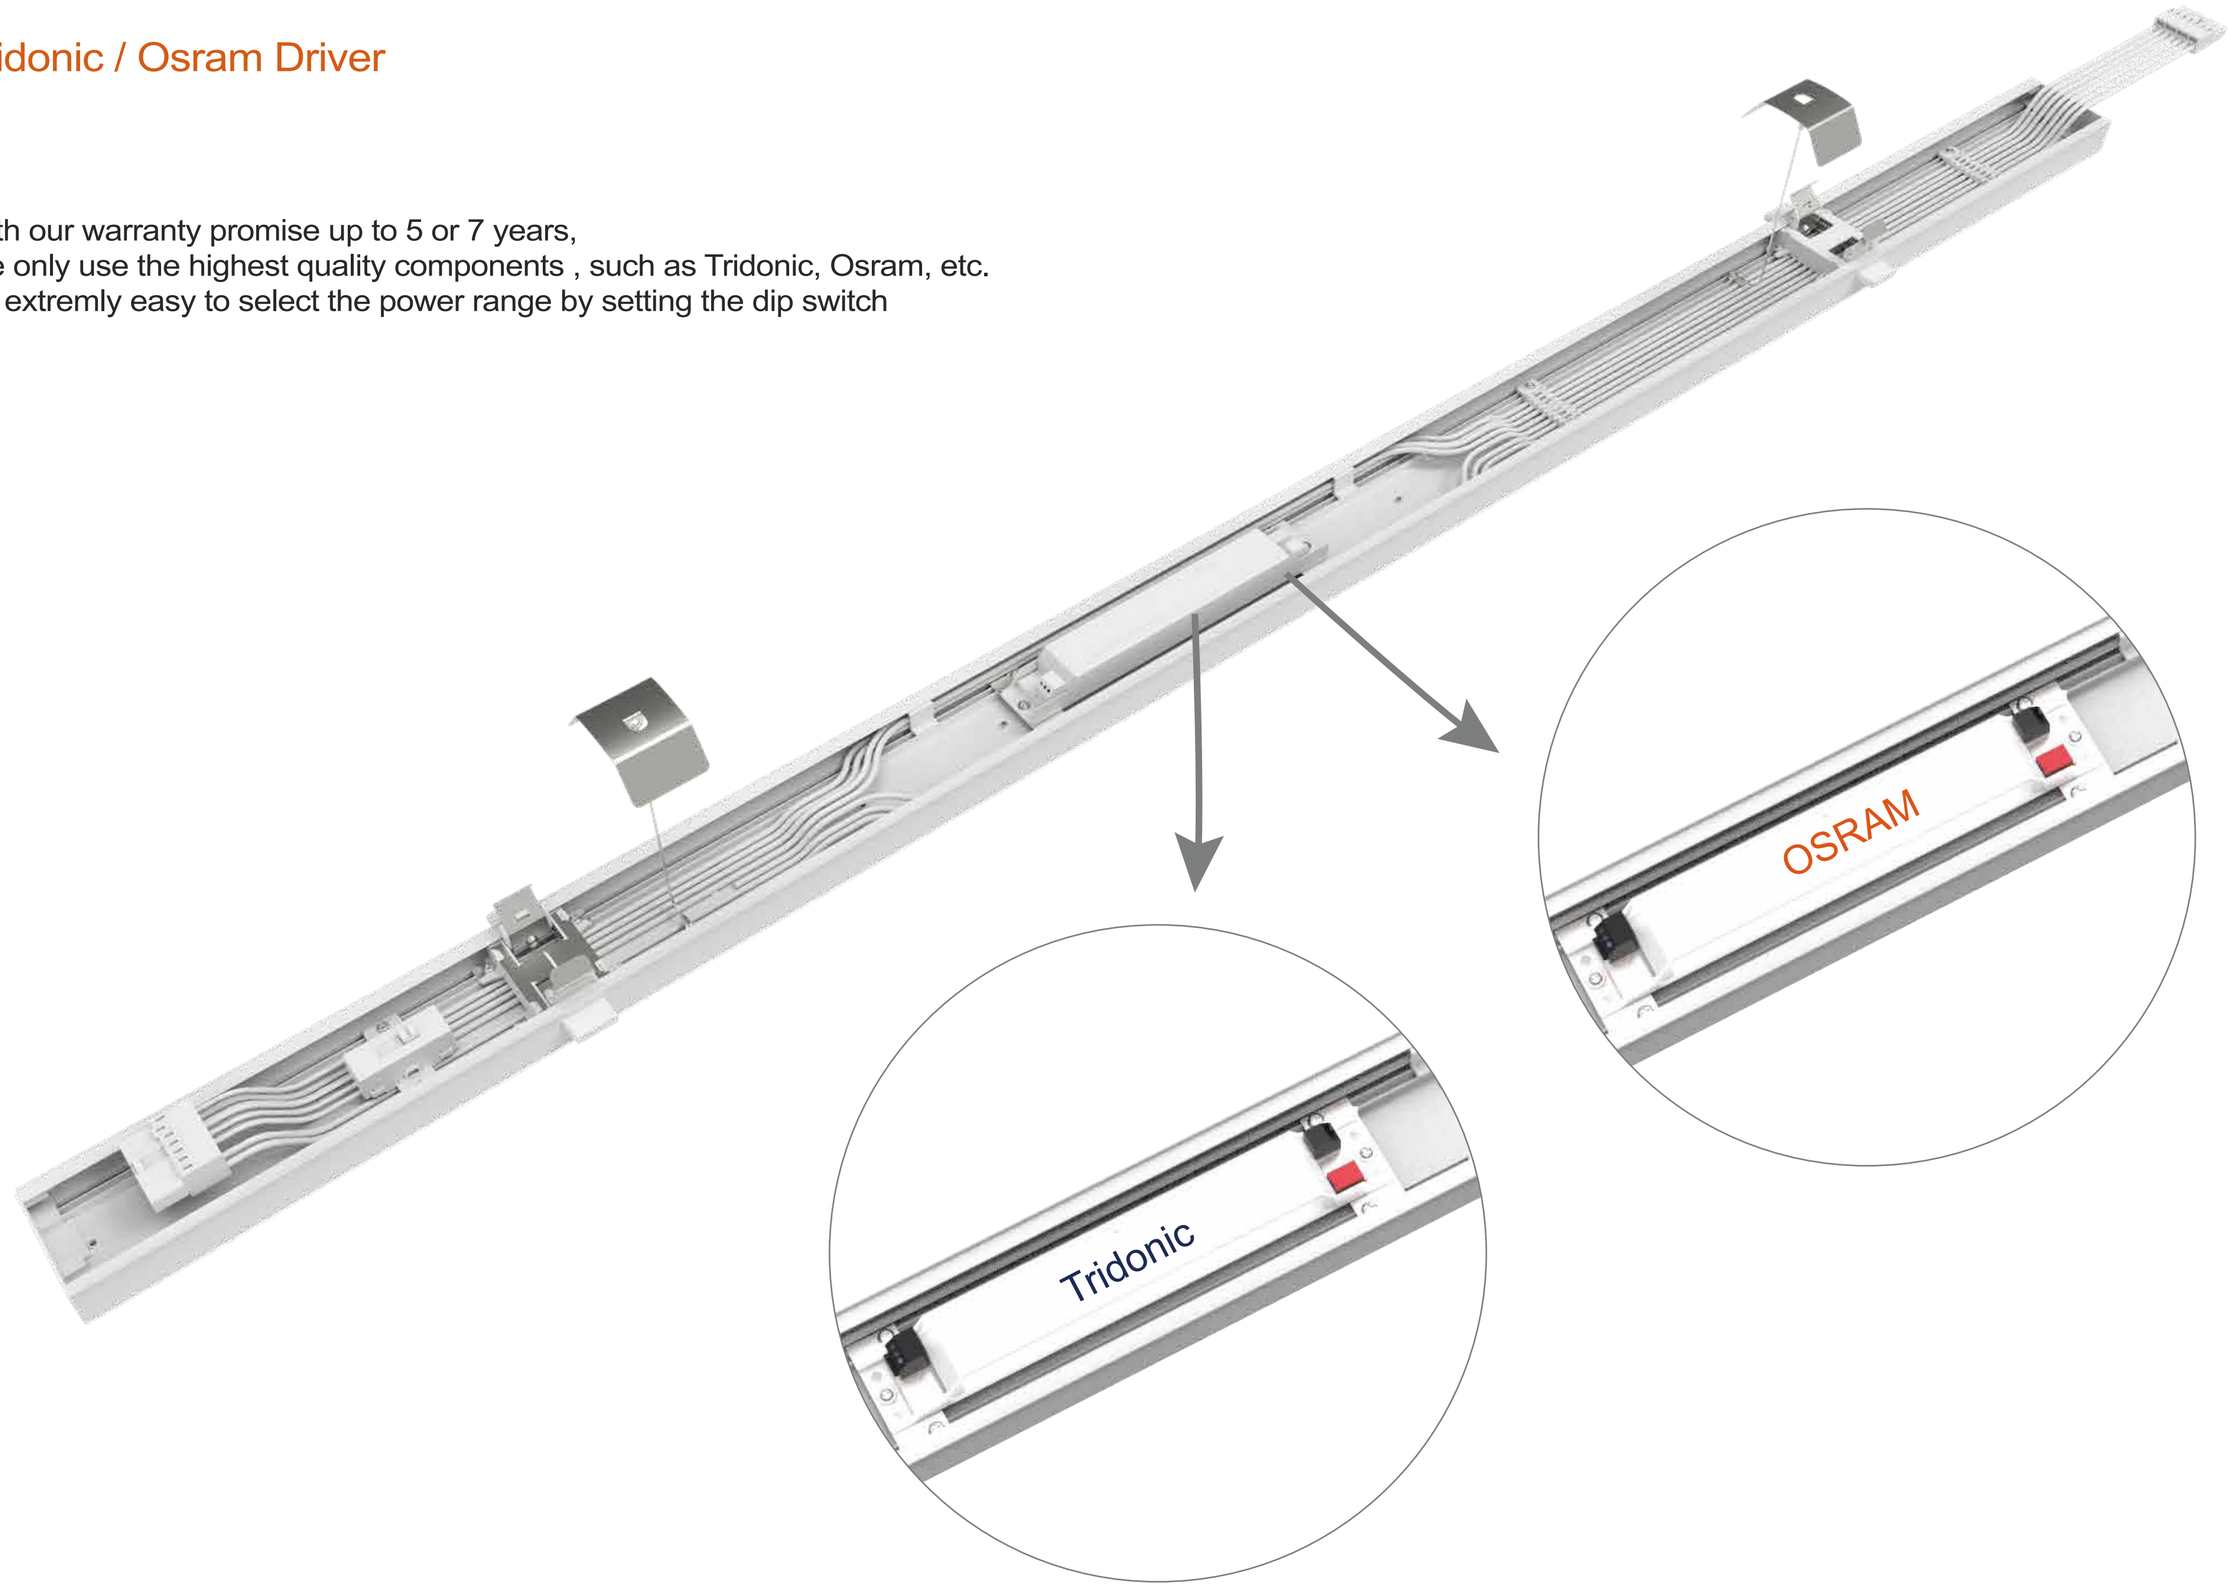

Datasheet



90°



60°(SP）



120°(FF)



30°(SP）



25° Double



Asymmetric-I

TYPE	POWER (W)	LUMEN (LM)	EFFICACY (LM/W)	CCT (K)	Driver (Brand)	Voltage (V)	Function	Dimensions (mm)	**WEIGHT(kg)**
A025S3-60W2XX-S1	60W adjust 50W 42W 32W by switch	Max 7800	130	3000K	OSRAM	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.85
A025S3-60N1XX-S1	60W adjust 50W 42W 32W by switch	Max 9000	160	4000K	OSRAM	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.85
A025S3-60P1XX-S1	60W adjust 50W 42W 32W by switch	Max 9000	160	5000K	OSRAM	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.85
A025S3-60C1XX-S1	60W adjust 50W 42W 32W by switch	Max 9000	160	6000K	OSRAM	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.85
A025S3-60W2XX-T1	60W adjust 55W 45W 42W by resistor	Max 7800	130	3000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.9
A025S3-60N1XX-T1	60W adjust 55W 45W 42W by resistor	Max 9000	160	4000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.9
A025S3-60P1XX-T1	60W adjust 55W 45W 42W by resistor	Max 9000	160	5000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.9
A025S3-60C1XX-T1	60W adjust 55W 45W 42W by resistor	Max 9000	160	6000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	1.9
A025P3-68W2XX-T1	16W to 68W by resistor	Max 9400	140	3000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	2.1
A025P3-68N1XX-T1	16W to 68W by resistor	Max 12,000	180	4000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	2.1
A025P3-68P1XX-T1	16W to 68W by resistor	Max 12,000	180	5000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	2.1
A025P3-68C1XX-T1	16W to 68W by resistor	Max 12,000	180	6000K	Tridonic	AC 220-240V	Non-Dimmable	1438 x 66 x 27	2.1
A025S5-72W2XX-A3	72W adjust 68W 64W 60W by switch	Max 8200	120	3000K	AGT	AC 220-240V	1-10V	1438 x 66 x 27	2.3
A025S5-72N1XX-A3	72W adjust 68W 64W 60W by switch	Max 9600	140	4000K	AGT	AC 220-240V	1-10V	1438 x 66 x 27	2.3
A025S5-72P1XX-A3	72W adjust 68W 64W 60W by switch	Max 9600	140	5000K	AGT	AC 220-240V	1-10V	1438 x 66 x 27	2.3
A025S5-72C1XX-A3	72W adjust 68W 64W 60W by switch	Max 9600	140	6000K	AGT	AC 220-240V	1-10V	1438 x 66 x 27	2.1
A025S5-68W2XX-T4	16W to 68W by resistor	Max 8800	130	3000K	Tridonic	AC 220-240V	DALI	1438 x 66 x 27	2.3
A025S5-68N1XX-T4	16W to 68W by resistor	Max 10,200	160	4000K	Tridonic	AC 220-240V	DALI	1438 x 66 x 27	2.3
A025S5-68P1XX-T4	16W to 68W by resistor	Max 10,200	160	5000K	Tridonic	AC 220-240V	DALI	1438 x 66 x 27	2.3
A025S5-68C1XX-T4	16W to 68W by resistor	Max 10,200	160	6000K	Tridonic	AC 220-240V	DALI	1438 x 66 x 27	2.3

Installation

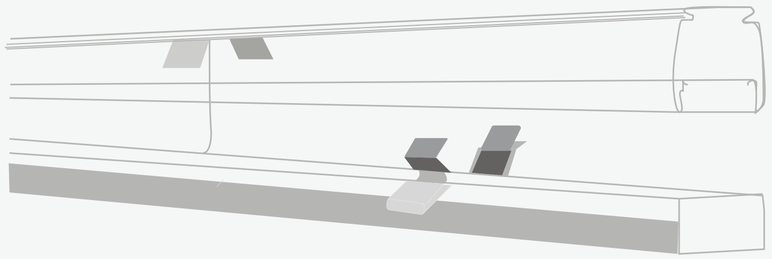

1 Suspension

After removing the old light module, use safety rope.

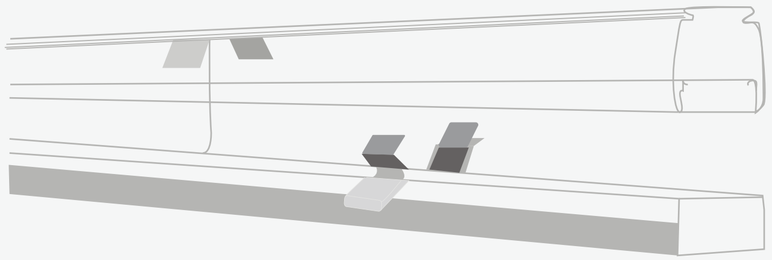

2 Connect the supply line

Connect the circuit by wago connectors.

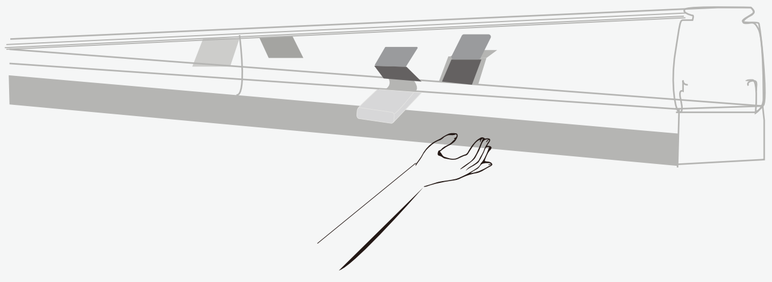

3 Click!

click the module into the old trunking rails.

Trunking Retrofit List

Nummer	Brand	Trunk name	Trunk size
1	Trilux	E-LINE 07650 XX 07690XX	
2	Trilux	218120 (7761/7861)	
3	Trilux	7190X 7920X	
4	Trilux	7770	
5	Ridi	VLG XX	
6	Ridi	VLT XX	
7	Regent	Traq	
8	Regiolux	SDT XX	
9	AEG	Maxos	

Nummer	Brand	Trunk name	Trunk size
10	Philips	Maxos TL5 Maxos TL-D	
11	Philips	TTX400 T5 TTX400 T8	
12	Siemens	5LS	
13	Siemens Siteo	5LJ80 XX	
14	Siteco	DUS	
15	Siteco	Modario	
16	Litec	N/A	
17	Ludwig	TR50W	
18	Antaris	Lichtband system	

Nummer	Brand	Trunk name	Trunk size
19	ClickLUX Tragschiene	701501880016 703002880017 704503880018	
20	Kandem	SV70, SV75	
21	RZB	Planos	
22	Newlec	HSDT	
23	Fluora	Nini-Fix	
24	Fluolite	TRX	
25	Zumtobel	ZX1	
26	Zumtobel	ZX2 T8 ZX2 T5	

Accessory

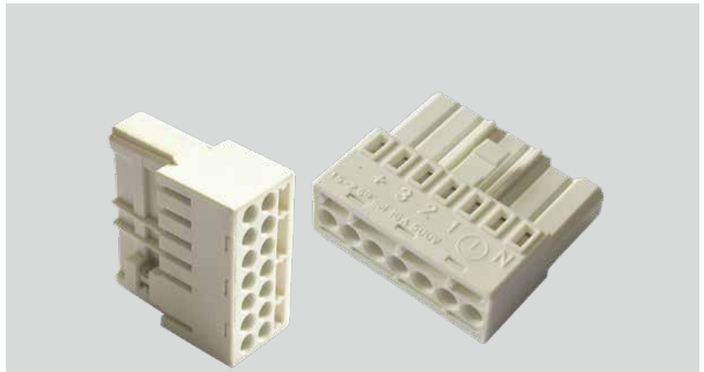

1

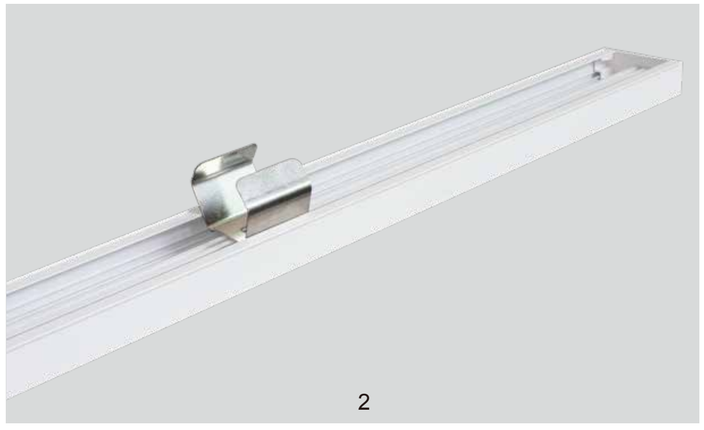

2

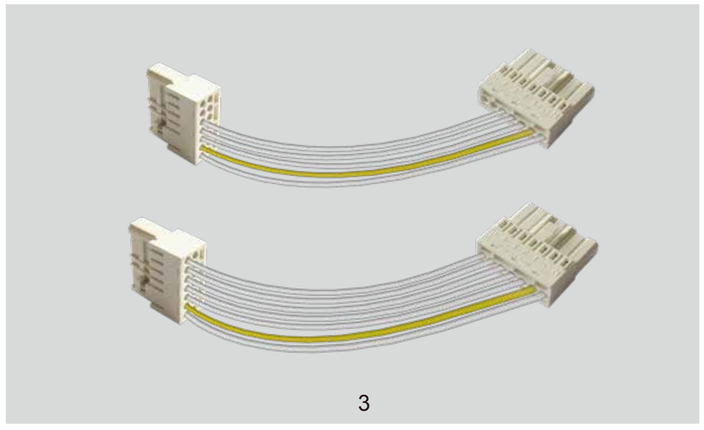

3

Item	Model No.	Discription
1	A01-04	7 pins ,male connecotr WAGO 267-501
2	A01-07	1438mm the blind cover
2	A01-08	1500mm the blind cover
2	A01-13	1530mm the blind cover
3	A01-09	1.5m 5 wire 2.5m² with 7pin male and female connector
3	A01-10	1.5m 7 wire 2.5m² with 7pin male and female connector